


# (W)GS2 Velocity Sensor with Analog or A/D converted synchronous serial output



## Velocity Sensor with Position Option

- Protection Class IP50
- Measurement Range:  
0 ... 1500 mm to 0 ... 2500 mm  
0 ... 59.06 in to 0 ... 98.43 in
- With Analog Output or  
A/D converted synchronous serial output

Discontinued model  
Don't use for further developments

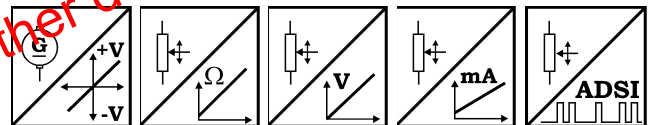

Specifications	Outputs
	Scaled / unscaled DC Tachometer
	Potentiometer: 1 kΩ
	Voltage: 0...10 V
	Current: 4 ... 20 mA, 2 or 3 wire
	Voltage and Current Output, adjustable
	A/D converted synchronous serial 12 Bit RS-485
Resolution	Essentially infinite / ADSI: 12 Bit Full Scale
Material	Aluminium and Stainless steel. Cable: Stainless Steel. Housing: Anticorrosive Sheet Steel
Sensing Device	Precision Potentiometer
Connector	Male Socket 8 pin DIN 45326
Position Linearity	Up to ±0.05 % Full Scale
Velocity Linearity	Up to ±0.25 % Full Scale
Protection Class (IEC 529)	IP50

### Order Code (W)GS2

<b>Model Name</b>	(W)GS	-		-		-		-		-	D8
<b>Measurement Range (in mm)</b>	1500 / 2000 / 2500										
<b>Position outputs</b>	R1K = Potentiometer 1 kΩ (other Values on Request e.g. 500 Ω) 10V = with 0 ... 10 V Signal Conditioner 420A = with 4 ... 20 mA Signal Conditioner (2 wire) 420T = with 4 ... 20 mA Signal Conditioner (3 wire) PMU = with 0...10 V/4...20 mA Signal Conditioner, adjustable ADSI = with A/D converted synchronous serial output 12 Bit / RS-485										
<b>Velocity outputs</b>	TA = 10 V/m/s; 0.423 V/100in/min approx. (unscaled DC Tachometer Output) T5 = 5 V/m/s; 0.212 V/100in/min (scaled DC Tachometer Output) Scaled Signal Conditioner: V2 = ±2 mm/s = ±10VDC    V10 = ±10 mm/s = ±10 VDC    V25 = ±25 mm/s = ±10 VDC V50 = ±50 mm/s = ±10VDC    V100 = ±100 mm/s = ±10 VDC    V250 = ±250 mm/s = ±10 VDC										
<b>Linearity (Position)</b>	L10 = ±0.10 % (L05 on request) L25 = ±0.25 %										
<b>DIN Connector</b>	D8 = Connector 8 pin DIN 45326										

Order Code Mating Connector (see accessories page 105)

**WS-CONN-D8**

**Order Example: WGS2 - 2500 - 10V - V10 - L10 - D8**


# (W)GS2 Velocity Sensor with Analog or A/D converted synchronous serial output



<b>Specifications</b> (Continuation)	Weight	2.1 kg approx.
	Environmental	
	Immunity to Interference (EMC)	Refer to Output Specification
	Temperature	Refer to Output Specification

<b>Cable Forces</b> typical at 20 °C	<b>Range</b>		<b>Maximum Pull-out Force</b>	<b>Minimum Pull-in Force</b>
	[mm]	[in]	[N]	[N]
	1500	59.06	10.2	6.7
	2000	78.74	8.4	5.4
	2500	98.43	7.2	4.8

## Outline drawing

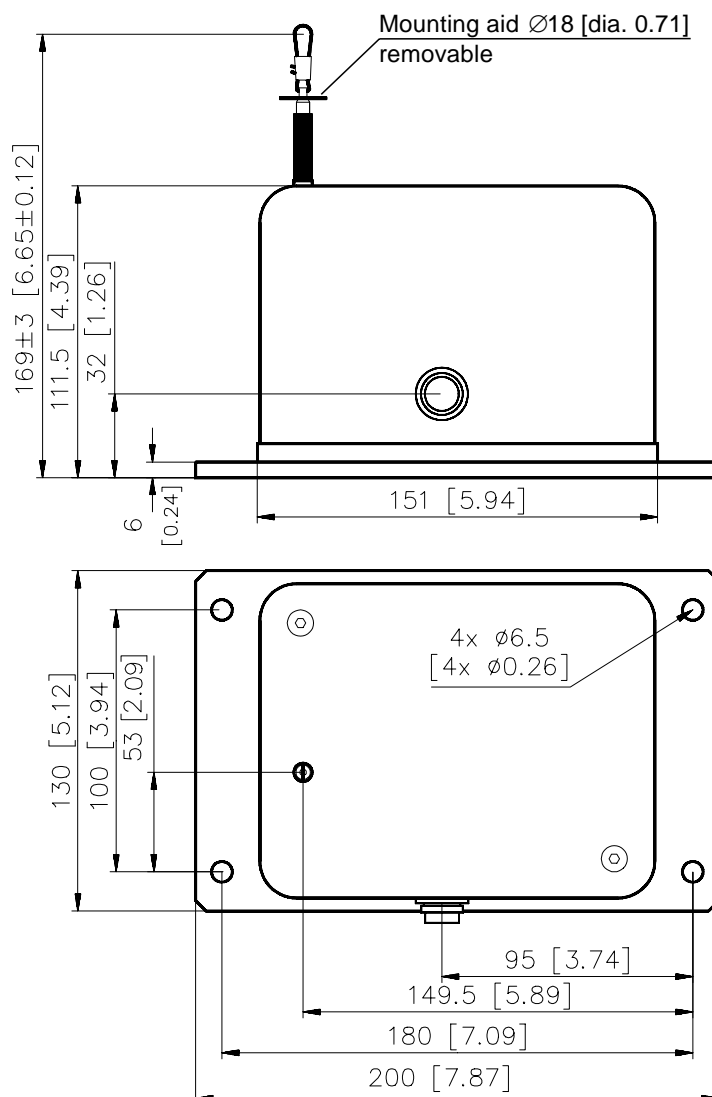

Dimensions in brackets are inches.  
For guaranteed dimensions consult factory


# WS Position Sensors

## Output Specifications R1K and 10V




<b>Voltage divider R1K</b> Potentiometer 	Excitation Voltage	32 VDC max. at 1 kΩ (Input Power 1 W max.)
	Potentiometer Impedance	1 kΩ ±10%
	Thermal coefficient	±0.0025% / K Full Scale
	Sensitivity	Depends on measurement range, individual sensitivity of sensor specified on label
	Voltage Divider Utilization Range	Approx. 3% ... 97% of Full Range
	Operating Temperature	-20 ... +85 °C


### Signal diagram



Note: The potentiometer must be connected as a voltage divider. The input impedance of the following processing circuit should be 10 MΩ min.

<b>Signal conditioner 10V</b> Voltage output 	Excitation Voltage	+18 ... +27 V DC non stabilized
	Excitation Current	20 mA max.
	Output Voltage	0 ... +10 V DC
	Output Current	2 mA max.
	Output Load	> 5 kΩ
	Stability (Temperature)	±0.005% / K Full Scale
	Protection	Reverse Polarity, Permanent Short Circuit
	Output Noise	0,5 mVRMS
	Operating Temperature	-20 ... +85 °C
	Immunity to interference (EMC)	According to EN 61326: 1998


### Signal diagram

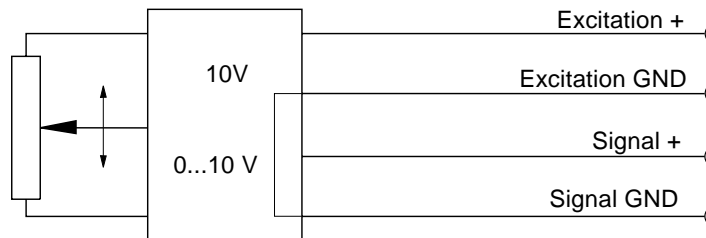

Signal Wiring	Output Signals	Connector	WS-CONN-D8
	R1K	10V	
	+ Vin	Excitation +	1
	GND	Excitation GND	2
	+ Vout	Signal +	3
		Signal GND	4
			5
			6
			7
			8

### Connection


#### Mating Connector

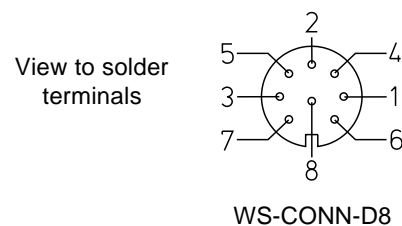


# WS Position Sensors

## Output Specifications 420A and 420T




<b>Signal conditioner</b> <b>420A</b> Current output (2 wire) 	Excitation Voltage	+12 ... 27 VDC non stabilized, measured at the sensor terminals
	Excitation Current	35 mA max.
	Output Current	4 ... 20 mA equivalent to 0 ... 100% Range
	Stability(Temperature)	±0.01% / K Full Scale
	Protection	Reverse Polarity, Permanent Short Circuit
	Output Noise	0.5 mV <sub>RMS</sub>
	Operating Temperature	-20 ... +85 °C
	Immunity to Interference (EMC)	According to EN 61326: 1998

### Signal Diagram

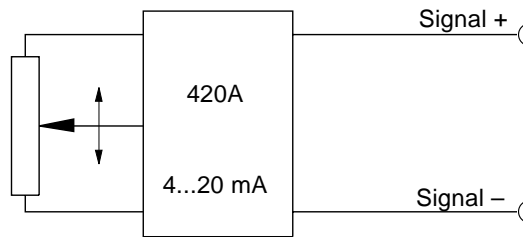

<b>Signal Conditioner</b> <b>420T</b> Current output (3 wire) 	Excitation Voltage	+18...+27 V DC non stabilized
	Excitation Current	40 mA max.
	Load Resistor	350 Ω max.
	Output Current	4 ... 20 mA equivalent to 0 ... 100% Range
	Stability (Temperature)	±0.005% / K Full Scale
	Protection	Reverse Polarity, Permanent Short Circuit
	Output Noise	0.5 mV <sub>RMS</sub>
	Immunity to Interference	According to EN 61326: 1998

### Signal diagram

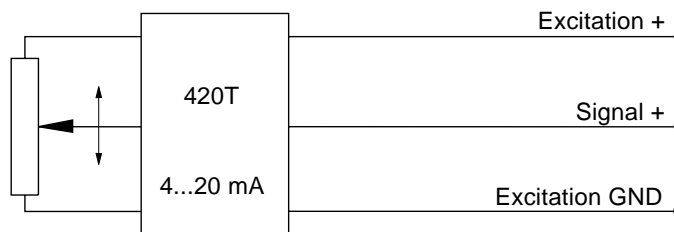


Signal Wiring	Output Signals		Connector
	420A	420T	
Signal +	Excitation +	Signal +	1
Signal -	Excitation GND	Excitation GND	2
		Signal +	3
			4
			5
			6
			7
			8

### Connection

Mating Connector

View to solder terminals




WS-CONN-D8


# WS Position Sensors

## Output Specification PMU

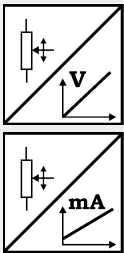

<b>Signal Conditioner</b> <b>PMU, adjustable</b> Voltage output and current output (3 wire) 	Excitation voltage	+18 ... 27 V DC
	Excitation current	50 mA max.
	Voltage output	0 ... 10 V
	Output current	10 mA max.
	Output load	1 kΩ min.
	Current output	4 ... 20 mA (3 wire)
	Load resistor	500 Ω max.
	Adjustment	
	Activation of offset and gain adjust	Connect with excitation GND (0 V)
	Scalable range	90 % max. full scale
	Stability (Temperature)	±50 ppm/°C full scale
	Protection	Reverse polarity, short circuit
	Output noise	1 mV <sub>eff</sub>
	Operating temperature	-20 ... +85 °C
EMC		
Immunity to interference	EN 61000-4-2, -4, -5, -6	
Influence according to EN 61000-4-6	1 % max. at testing strength 4	
Emission of interference	CISPR 11	


### Signal diagram

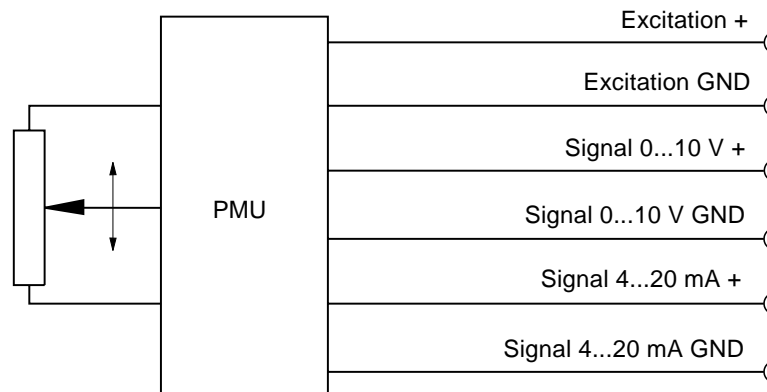

Signal wiring	Output signals PMU	Connector WS-CONN-D8
	Excitation +	1
	Excitation GND	2
	Signal 0...10 V +	3
	Signal 0...10 V GND	4
	Signal 4...20 mA +	5
	Signal 4...20 mA GND	6
	Offset	7
	Gain	8

### Connection

Mating Connector

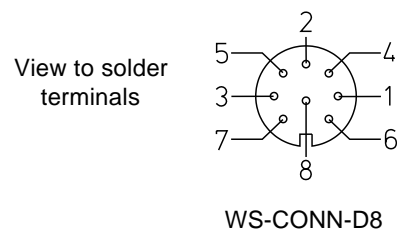

# WS Position Sensors


## Output Specification ADCAN



### Description


Signal conditioner with CANopen interface for WS Position Sensors and AWS Angle Sensors. The sensing device of the ADCAN is a precision potentiometer. Start, stop, synchronization of the position data transmission and parameter programming will be supported according to the CANopen standard DS301. Two process data objects (PDO) will be transmitted to transfer the position value and cam events.

### Signal Conditioner ADCAN (CANopen)



CANopen interface	
Excitation Voltage	+24 V
Specifications	Communication Profile DS301 Encoder Profile DS406
One Service Data Object (SDO)	Parameter setting
Two Process Data Objects (PDO)	Position value, cam
Transmission Rate	125 kBd, variable by SDO
Node ID	Default 01, variable by SDO
Resolution	16 Bit
Transmission mode	Synchronous, asynchronous cyclic or dependant on event

### Output signals

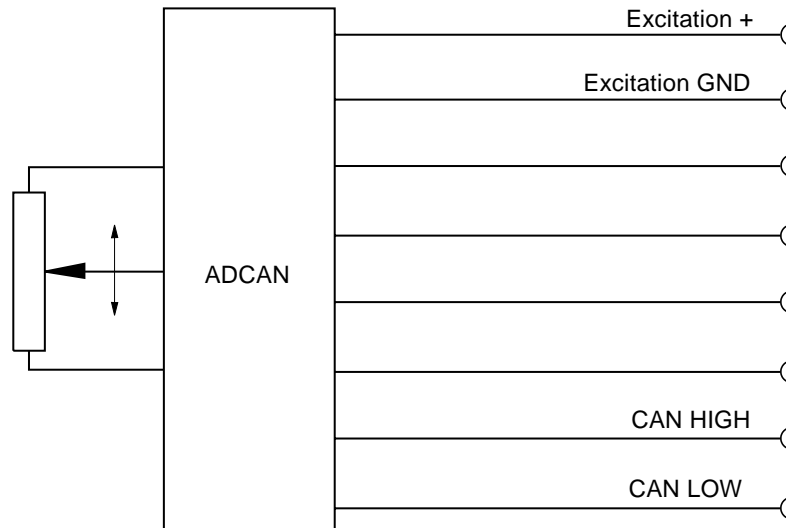


### Signal wiring

Signals ADCAN	Connector WS-CONN-D8
Excitation +24 V	1
Excitation GND	2
CAN LOW	7
CAN HIGH	8

### Connection


Mating connector

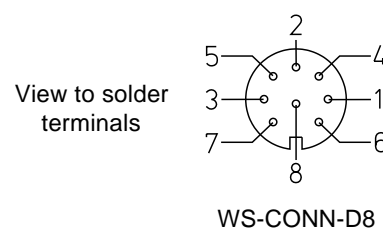


# WS Position Sensors


## Output Specifications TA and T5




<b>Tacho TA</b> Unscaled DC Tachometer 	Output Voltage	100 VDC maximum permissible (self-generating)
	Output Load	> 100 kΩ
	Stability (Temperature)	±0.02% / K Full Scale
	Output Impedance	500 Ω approx.
	Sensitivity	10 V/m/s approx., depends on the tachometer design: Individual measured sensitivity specified on label.
	Linearity	±1%
	Operation Temperature	-20 ... +85 °C
	Immunity to Interference (EMC)	According to EN 61326: 1998

### Signal Diagram

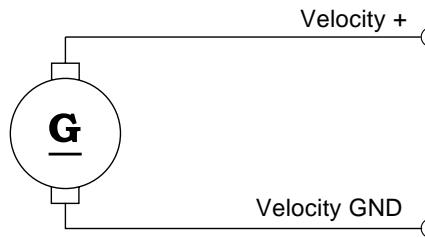

<b>Tacho T5</b> Scaled DC Tachometer 	Output voltage	50 VDC maximum permissible (self-generating)
	Output Load	> 100 kΩ
	Stability (Temperature)	±0.02% / K Full Scale
	Output Impedance	500 Ω approx.
	Sensitivity	5 V/m/s
	Linearity	±1%
	Operation Temperature	-20 ... +85 °C
	Immunity to Interference (EMC)	According to EN 61326: 1998


### Signal Diagram

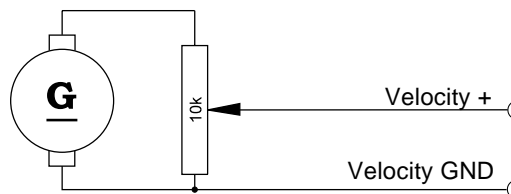

Signal Wiring	Output Signals	Connector
	TA	T5
		1
		2
		3
		4
	Velocity +	5
	Velocity GND	6
		7
		8


### Connection

#### Mating Connector

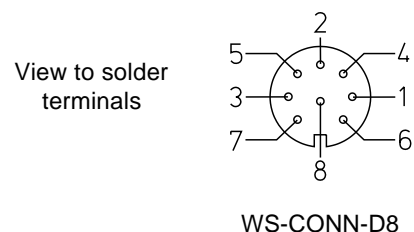


# WS Position Sensor Output Specification VXXX



<b>Signal Conditioner</b> <b>VXXX</b> Scaled DC Tachometer 	Excitation Voltage	+14 ... +27 VDC non stabilized
	Excitation Current	20 mA max.
	Output Voltage	-10 ... +10 VDC
	Output Current	1 mA max.
	Output Load	> 10 kΩ
	Stability (Temperature)	±0.01% / K Full Scale
	Protection	Reverse Polarity, Permanent Short Circuit
	Output Noise	0.5 mV <sub>RMS</sub>
	Velocity Ranges	2 / 10 / 25 / 50 / 100 / 250 mm/s
	Linearity	±0.25% Full Scale, <100 mm/s: 1 % Full Scale
	Operating Temperature	-20 ... +85 °C
Immunity to interference (EMC)	According to EN 61326: 1998	


## Signal Diagram

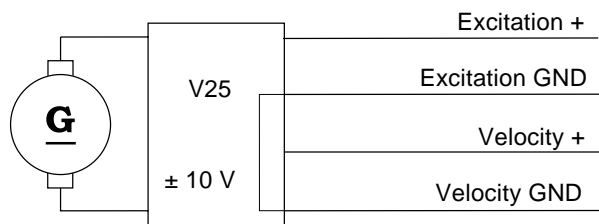

Signal Wiring	Output Signals VXXX	Connector WS-CONN-D8
	Excitation +	1
	Excitation GND	2
		3
		4
	Velocity +	5
	Velocity GND	6
		7
		8

## Connection Mating Connector

View to solder  
terminals



WS-CONN-D8



# WS Position Sensors

## Output Specification ADSI




- Resolution 12 Bit, Data Transmission synchronous serial
- No Loss of Data at Power-down
- Easy to Connect to PLC's with SSI Input Circuit

### Description

The sensing device of the ADSI is a precision potentiometer. The position information is given by an analog/digital converter output serialized as a data word. Data transmission takes place by means of the signals CLOCK and DATA. The processing unit (PLC, Micro-computer) sends pulse sequences which clock the data transmission with the required transfer rate. With the first falling edge of a pulse sequence the position of the sensor is recorded and stored. The following rising edges control the bit-by-bit A/D conversion, encoding and output of the data word.


After a delay time the next new position information will be transmitted.

### Data Format (Train of 26 Pulses)

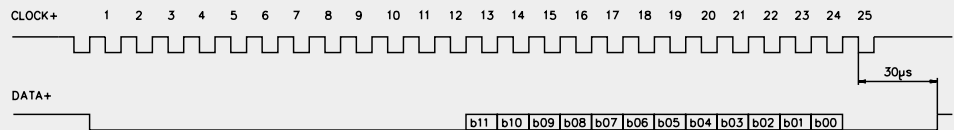


### Signal Conditioner ADSI

A/D converted  
synchronous serial



Output	EIA RS-422, RS-485, short-circuit proof
Excitation Voltage	11 ... 27 VDC
Excitation Current	200 mA max.
Clock Frequency	70 ... 500 kHz
Code	Gray Code, Continuous Progression
Delay between Pulse Trains	T=30 µs min.
Resolution	12 Bit (4096 Counts) Full Scale
Stability (Temperature)	±0.005% / K Full Scale
Operation Temperature	-20 ... +85 °C
Immunity to Interference (EMC)	According to EN 61326: 1998

### Recommended Processing Input Circuit

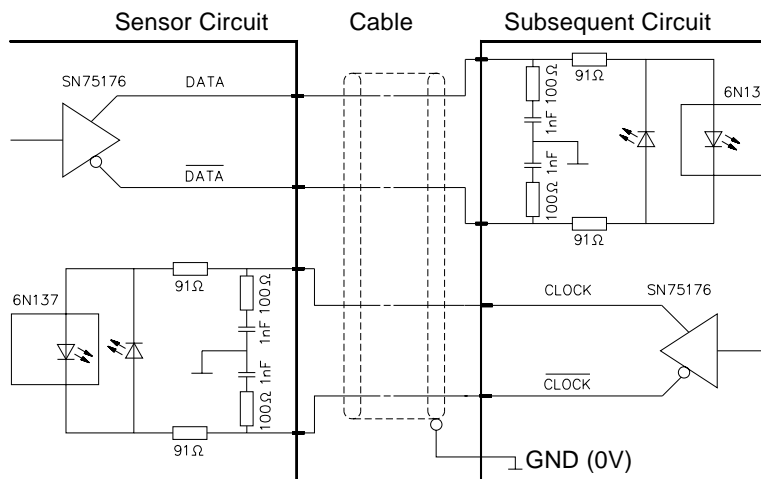


Cable Length	Baud Rate
50 m	300 kHz
200 m	100 kHz

#### Note:

Extension of the cable length will reduce the maximum transmission rate. The signals CLOCK/CLOCK and DATA/DATA must be connected in a twisted pair cable, shielded per pair and common.

### Signal Wiring / Connection

Signal name	Connector Pin
Excitation +	1
Excitation GND (0V)	2
CLOCK	3
CLOCK	4
DATA	5
DATA	6
Screen	not connected



Mating Connector  
View to solder terminals

WS-CONN-D8