


W(G)S3.1 Position Sensor with Analog or A/D converted synchronous serial output



Position and Velocity Sensor for Long Ranges

- Protection Class IP50
- Measurement Range:
0 ... 10000 mm to 0 ... 15000 mm
0 ... 393.7 in to 0 ... 590.6 in
- With Analog Output or
A/D converted synchronous serial output

Discontinued model
Don't use for further developments

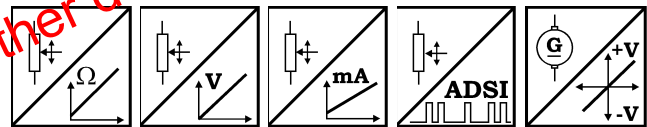

Specifications	Outputs
	Potentiometer: 1 kΩ
	Voltage: 0...10 V
	Current: 4...20 mA, 2 or 3 wire
	Voltage and Current Output, adjustable
	A/D converted synchronous serial 12 Bit RS-485
	Scaled / unscaled DC Tachometer
Resolution	Essentially infinite / ADSI: 12 Bit Full Scale
Material	Aluminium and Stainless Steel. Cable: Stainless Steel. Housing: Anticorrosive Sheet Steel
Sensing Device	Precision Potentiometer
Connector	Male Socket 8 pin DIN 45326
Position Linearity	Up to ±0.05 % Full Scale
Velocity Linearity	Up to ±0.25 % Full Scale

**Order Code WS3.1
GS3.1 / WGS3.1**

XXX3.1 - [] - [] - [] - [] - **D8**

Model name

- WS = Position Sensor
- GS = Velocity Sensor
- WGS = Position and Velocity Sensor

Measurement Range (in mm)

10000 / 12500 / 15000

Position Outputs

- R1K = Potentiometer 1 kΩ (other Values on Request e.g. 500 Ω)
- 10V = with 0 ... 10 V Signal Conditioner
- 420A = with 4 ... 20 mA Signal Conditioner (2 wire)
- 420T = with 4 ... 20 mA Signal Conditioner (3 wire)
- PMU = with 0...10 V/4...20 mA Signal Conditioner, adjustable
- ADSI = with A/D converted synchronous serial output 12 Bit / RS-485

Velocity Outputs

- TA = approx. 10 V/m/s; 0.423 V/100in/min (unscaled DC Tachometer Output)
- T5 = 5 V/m/s; 0.212 V/100in/min (scaled DC Tachometer Output)
- Scaled Signal Conditioner:
 V2 = ±2 mm/s = ±10 VDC V10 = ±10 mm/s = ±10 VDC V25 = ±25 mm/s = ±10 VDC
 V50 = ±50 mm/s = ±10 VDC V100 = ±100 mm/s = ±10 VDC V250 = ±250 mm/s = ±10 VDC

Linearity (Position)

- L10 = ±0.10 % (L05 on request)
- L25 = ±0.25 %

DIN Connector

D8 = Connector 8 pin DIN 45326

Order Code Mating Connector (see accessories page 105)

WS-CONN-D8

Order Example: WS3.1 - 15000 - 10V - L10 - D8


W(G)S3.1 Position Sensor with Analog or A/D converted synchronous serial output



Specifications (Continuation)	Protection Class (IEC 529)	IP50
	Weight	5.1 kg approx.
	Environmental	
	Immunity to Interference (EMC)	Refer to Output Specification
	Temperature	Refer to Output Specification

Cable Forces typical at 20 °C	Range		Maximum Pull-out Force [N]	Minimum Pull-in Force [N]
	[mm]	[in]		
	10000	393.7	10.6	6.2
	12500	492.1	8.6	5.1
	15000	590.6	7.2	4.3

Outline drawing

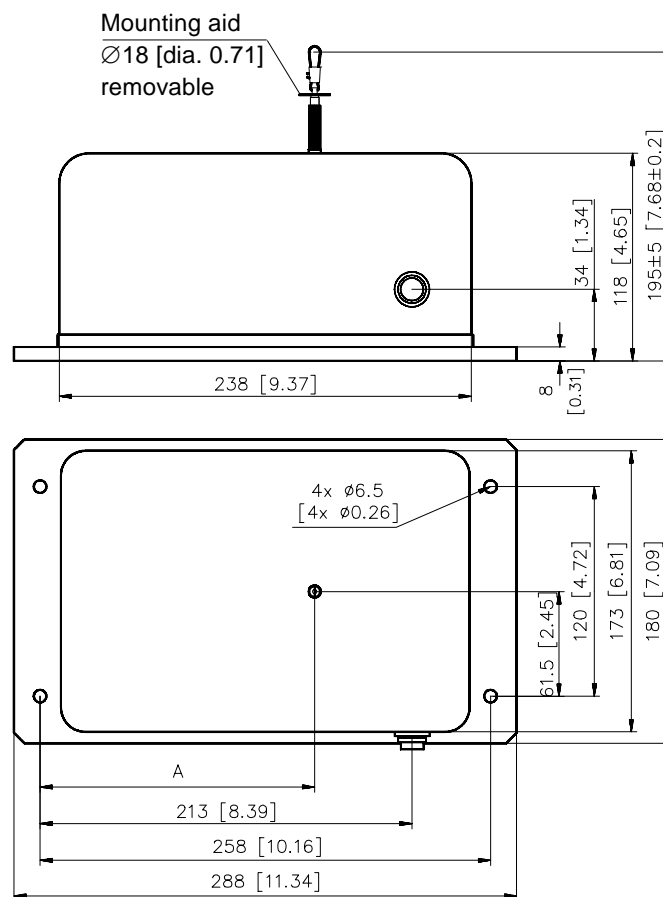

Dimensions in brackets are inches.
For guaranteed dimensions consult factory


Dimensions	Model	A
		WS3.1
	GS3.1; WGS3.1	140 [5.5 in]

WS3.1 Position Sensor with Incremental Encoder




Compact Sensor for Long Ranges

- Protection Class IP50
- Measurement Range:
0 ... 15000 mm
0 ... 590.6 in
- With Incremental Encoder Output



Specifications	Outputs	Incremental Encoder Output with differential Push-pull Circuit for reliable Data Transmission. The output is compatible with LD, HTL, TTL and CMOS.
	Resolution	1 Pulse per mm; 25.4 pulses per in
	Distance between Reference Pulses	1500 mm
	Material	Aluminium and Stainless Steel. Cable: Stainless steel. Housing: Anticorrosive Sheet Steel
	Sensing Device	Incremental Encoder
	Connector	Male Socket 8 pin DIN 45326
	Linearity	±0.05 % Full Scale
	Protection Class (IEC 529)	IP50
	Weight	5.1 kg approx.
	Environmental	
Immunity to Interference (EMC)	Refer to Output Specification	
Temperature	Refer to Output Specification	

Order Code WS3.1 incremental

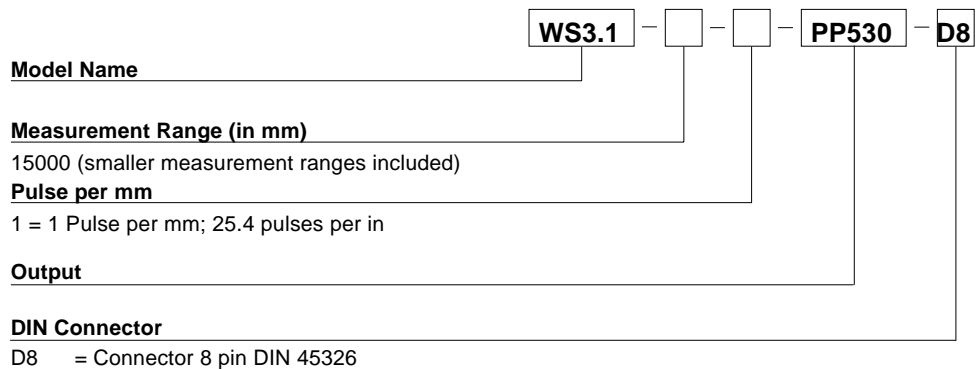

Order Code Mating Connector (see accessories page 105)

WS-CONN-D8


Order Example: WS3.1 - 15000 - 1 - PP530 - D8

WS3.1 Position Sensor with Incremental Encoder



Cable Forces typical at 20 °C	Range		Maximum Pull-out Force [N]	Minimum Pull-in Force [N]
	[mm]	[in]		
	15000	590.6	7.7	4.5

Outline drawing

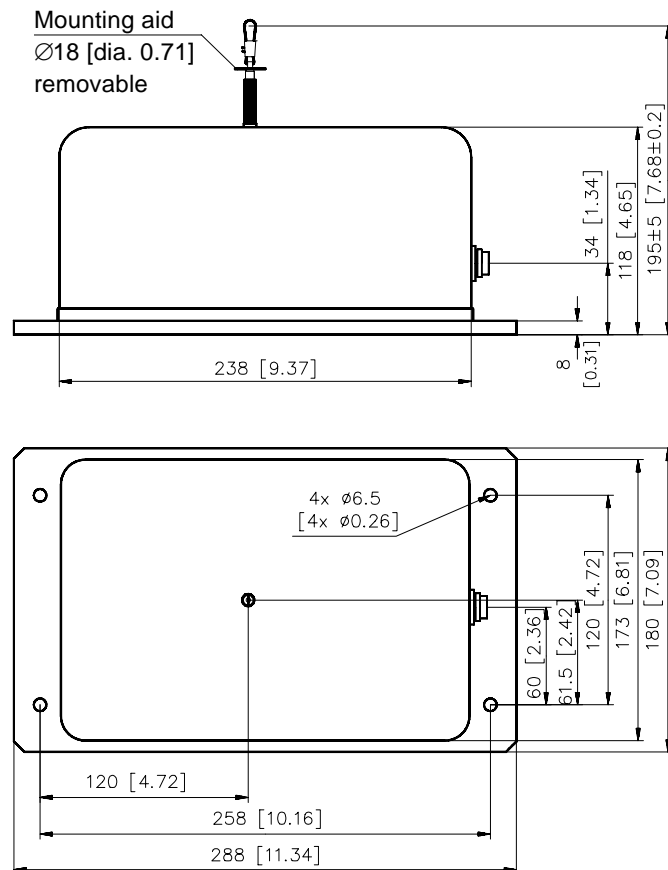

Dimensions in brackets are inches.
 For guaranteed dimensions consult factory


WS Position Sensors

Output Specifications R1K and 10V




Voltage divider R1K Potentiometer 	Excitation Voltage	32 VDC max. at 1 k Ω (Input Power 1 W max.)
	Potentiometer Impedance	1 k Ω \pm 10%
	Thermal coefficient	\pm 0.0025% / K Full Scale
	Sensitivity	Depends on measurement range, individual sensitivity of sensor specified on label
	Voltage Divider Utilization Range	Approx. 3% ... 97% of Full Range
	Operating Temperature	-20 ... +85 $^{\circ}$ C


Signal diagram



Note: The potentiometer must be connected as a voltage divider. The input impedance of the following processing circuit should be 10 M Ω min.

Signal conditioner 10V Voltage output 	Excitation Voltage	+18 ... +27 V DC non stabilized
	Excitation Current	20 mA max.
	Output Voltage	0 ... +10 V DC
	Output Current	2 mA max.
	Output Load	> 5 k Ω
	Stability (Temperature)	\pm 0.005% / K Full Scale
	Protection	Reverse Polarity, Permanent Short Circuit
	Output Noise	0,5 mVRMS
	Operating Temperature	-20 ... +85 $^{\circ}$ C
Immunity to interference (EMC)	According to EN 61326: 1998	


Signal diagram

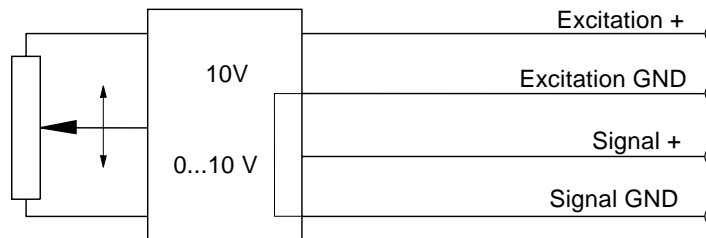

Signal Wiring	Output Signals	Connector	WS-CONN-D8
	R1K	10V	
	+ Vin	Excitation +	1
	GND	Excitation GND	2
	+ Vout	Signal +	3
		Signal GND	4
			5
			6
			7
			8

Connection


Mating Connector

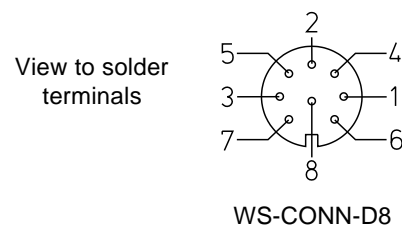


WS Position Sensors

Output Specifications 420A and 420T




Signal conditioner 420A Current output (2 wire) 	Excitation Voltage	+12 ... 27 VDC non stabilized, measured at the sensor terminals
	Excitation Current	35 mA max.
	Output Current	4 ... 20 mA equivalent to 0 ... 100% Range
	Stability(Temperature)	±0.01% / K Full Scale
	Protection	Reverse Polarity, Permanent Short Circuit
	Output Noise	0.5 mV _{RMS}
	Operating Temperature	-20 ... +85 °C
	Immunity to Interference (EMC)	According to EN 61326: 1998

Signal Diagram

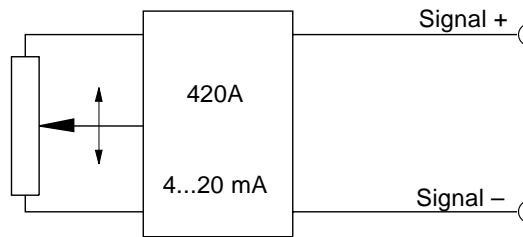

Signal Conditioner 420T Current output (3 wire) 	Excitation Voltage	+18...+27 V DC non stabilized
	Excitation Current	40 mA max.
	Load Resistor	350 Ω max.
	Output Current	4 ... 20 mA equivalent to 0 ... 100% Range
	Stability (Temperature)	±0.005% / K Full Scale
	Protection	Reverse Polarity, Permanent Short Circuit
	Output Noise	0.5 mV _{RMS}
	Operating Temperature	-20 ... +85 °C
Immunity to Interference	According to EN 61326: 1998	

Signal diagram

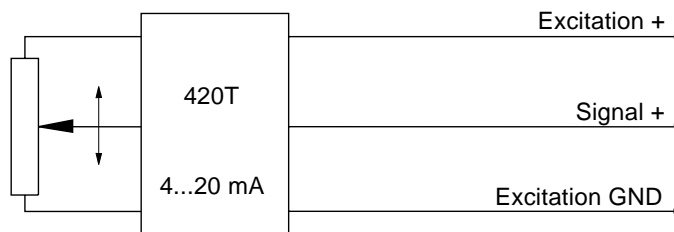


Signal Wiring	Output Signals		Connector
	420A	420T	
Signal +	Excitation +		1
Signal -	Excitation GND		2
	Signal +		3
			4
			5
			6
			7
			8

Connection

Mating Connector

View to solder terminals



WS-CONN-D8


WS Position Sensors

Output Specification PMU



Signal Conditioner PMU, adjustable Voltage output and current output (3 wire) 	Excitation voltage	+18 ... 27 V DC
	Excitation current	50 mA max.
	Voltage output	0 ... 10 V
	Output current	10 mA max.
	Output load	1 k Ω min.
	Current output	4 ... 20 mA (3 wire)
	Load resistor	500 Ω max.
	Adjustment	
	Activation of offset and gain adjust	Connect with excitation GND (0 V)
	Scalable range	90 % max. full scale
	Stability (Temperature)	± 50 ppm/ $^{\circ}$ C full scale
	Protection	Reverse polarity, short circuit
	Output noise	1 mV _{eff}
	Operating temperature	-20 ... +85 $^{\circ}$ C
EMC		
Immunity to interference	EN 61000-4-2, -4, -5, -6	
Influence according to EN 61000-4-6	1 % max. at testing strength 4	
Emission of interference	CISPR 11	


Signal diagram

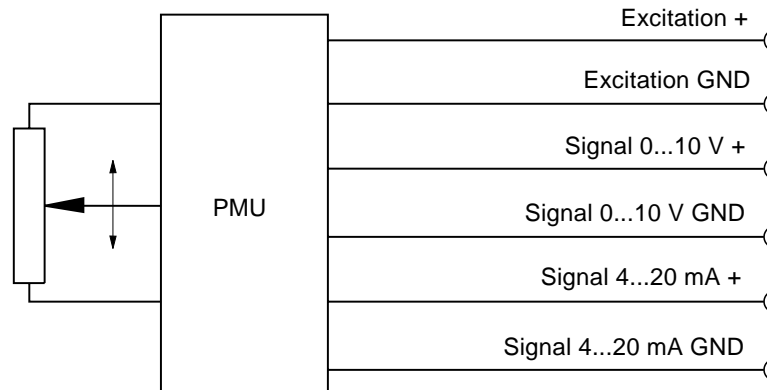

Signal wiring	Output signals PMU	Connector WS-CONN-D8
	Excitation +	1
	Excitation GND	2
	Signal 0...10 V +	3
	Signal 0...10 V GND	4
	Signal 4...20 mA +	5
	Signal 4...20 mA GND	6
	Offset	7
	Gain	8

Connection

Mating Connector

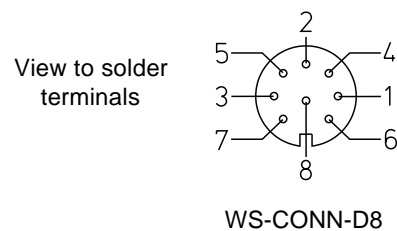

WS Position Sensors


Output Specification ADCAN



Description


Signal conditioner with CANopen interface for WS Position Sensors and AWS Angle Sensors. The sensing device of the ADCAN is a precision potentiometer. Start, stop, synchronization of the position data transmission and parameter programming will be supported according to the CANopen standard DS301. Two process data objects (PDO) will be transmitted to transfer the position value and cam events.

Signal Conditioner ADCAN (CANopen)



CANopen interface	
Excitation Voltage	+24 V
Specifications	Communication Profile DS301 Encoder Profile DS406
One Service Data Object (SDO)	Parameter setting
Two Process Data Objects (PDO)	Position value, cam
Transmission Rate	125 kBd, variable by SDO
Node ID	Default 01, variable by SDO
Resolution	16 Bit
Transmission mode	Synchronous, asynchronous cyclic or dependant on event

Output signals

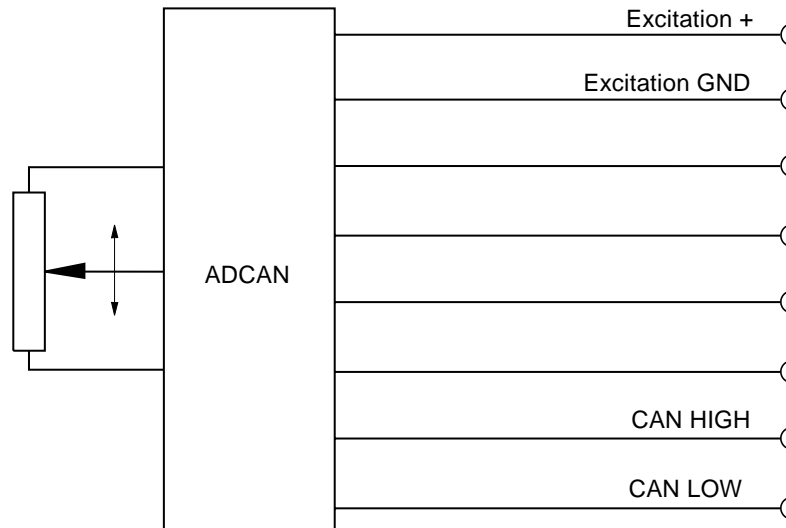


Signal wiring

Signals ADCAN	Connector WS-CONN-D8
Excitation +24 V	1
Excitation GND	2
CAN LOW	7
CAN HIGH	8

Connection


Mating connector

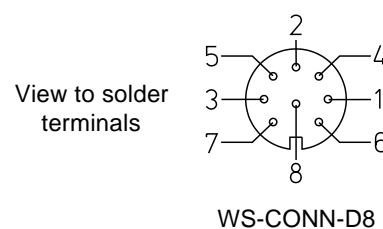


WS Position Sensors


Output Specifications TA and T5




Tacho TA Unscaled DC Tachometer 	Output Voltage	100 VDC maximum permissible (self-generating)
	Output Load	> 100 kΩ
	Stability (Temperature)	±0.02% / K Full Scale
	Output Impedance	500 Ω approx.
	Sensitivity	10 V/m/s approx., depends on the tachometer design: Individual measured sensitivity specified on label.
	Linearity	±1%
	Operation Temperature	-20 ... +85 °C
	Immunity to Interference (EMC)	According to EN 61326: 1998

Signal Diagram

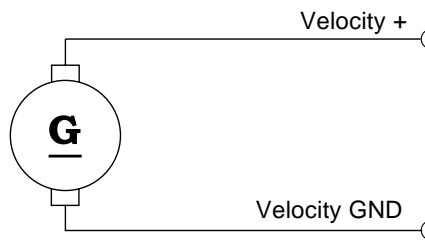

Tacho T5 Scaled DC Tachometer 	Output voltage	50 VDC maximum permissible (self-generating)
	Output Load	> 100 kΩ
	Stability (Temperature)	±0.02% / K Full Scale
	Output Impedance	500 Ω approx.
	Sensitivity	5 V/m/s
	Linearity	±1%
	Operation Temperature	-20 ... +85 °C
	Immunity to Interference (EMC)	According to EN 61326: 1998


Signal Diagram

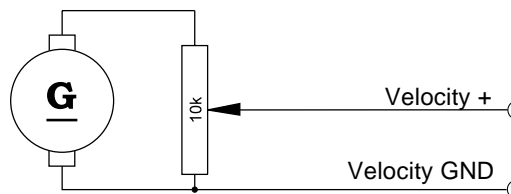

Signal Wiring	Output Signals	Connector
	TA	T5
		1
		2
		3
		4
	Velocity +	5
	Velocity GND	6
		7
		8

Connection


Mating Connector

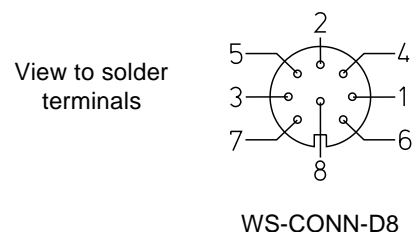


WS Position Sensor

Output Specification VXXX




Signal Conditioner VXXX Scaled DC Tachometer 	Excitation Voltage	+14 ... +27 VDC non stabilized
	Excitation Current	20 mA max.
	Output Voltage	-10 ... +10 VDC
	Output Current	1 mA max.
	Output Load	> 10 kΩ
	Stability (Temperature)	±0.01% / K Full Scale
	Protection	Reverse Polarity, Permanent Short Circuit
	Output Noise	0.5 mV _{RMS}
	Velocity Ranges	2 / 10 / 25 / 50 / 100 / 250 mm/s
	Linearity	±0.25% Full Scale, <100 mm/s: 1 % Full Scale
	Operating Temperature	-20 ... +85 °C
Immunity to interference (EMC)	According to EN 61326: 1998	

Signal Diagram

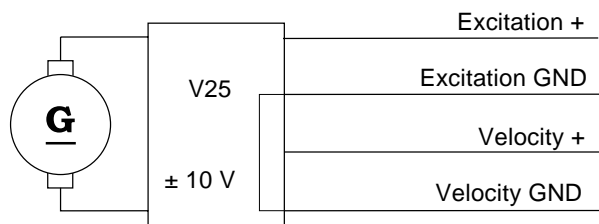

Signal Wiring	Output Signals VXXX	Connector WS-CONN-D8
	Excitation +	1
	Excitation GND	2
		3
		4
	Velocity +	5
	Velocity GND	6
		7
		8

Connection Mating Connector

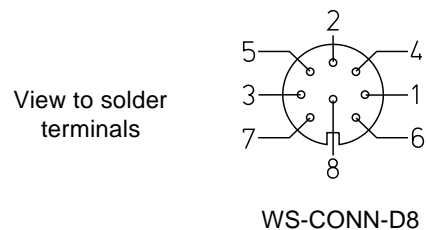

WS Position Sensors

Output Specification ADSI




- Resolution 12 Bit, Data Transmission synchronous serial
- No Loss of Data at Power-down
- Easy to Connect to PLC's with SSI Input Circuit

Description

The sensing device of the ADSI is a precision potentiometer. The position information is given by an analog/digital converter output serialized as a data word. Data transmission takes place by means of the signals CLOCK and DATA. The processing unit (PLC, Micro-computer) sends pulse sequences which clock the data transmission with the required transfer rate. With the first falling edge of a pulse sequence the position of the sensor is recorded and stored. The following rising edges control the bit-by-bit A/D conversion, encoding and output of the data word.


After a delay time the next new position information will be transmitted.

Data Format (Train of 26 Pulses)

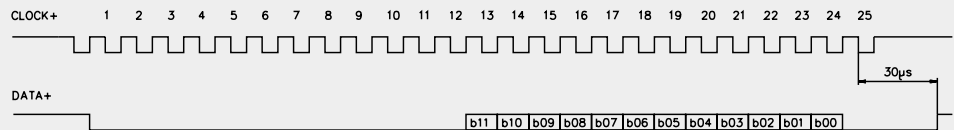


Signal Conditioner ADSI

A/D converted
synchronous serial



Output	EIA RS-422, RS-485, short-circuit proof
Excitation Voltage	11 ... 27 VDC
Excitation Current	200 mA max.
Clock Frequency	70 ... 500 kHz
Code	Gray Code, Continuous Progression
Delay between Pulse Trains	T=30 µs min.
Resolution	12 Bit (4096 Counts) Full Scale
Stability (Temperature)	±0.005% / K Full Scale
Operation Temperature	-20 ... +85 °C
Immunity to Interference (EMC)	According to EN 61326: 1998

Recommended Processing Input Circuit

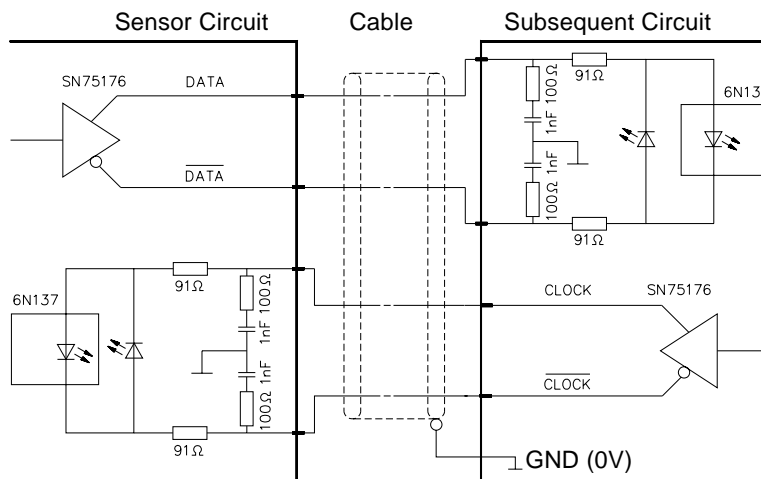


Cable Length	Baud Rate
50 m	300 kHz
200 m	100 kHz

Note:

Extension of the cable length will reduce the maximum transmission rate. The signals CLOCK/CLOCK and DATA/DATA must be connected in a twisted pair cable, shielded per pair and common.

Signal Wiring / Connection

Signal name	Connector Pin
Excitation +	1
Excitation GND (0V)	2
CLOCK	3
CLOCK	4
DATA	5
DATA	6
Screen	not connected




Mating Connector
View to solder terminals

WS-CONN-D8


WS Position Sensors

Output Specification PP530




Signal Conditioner PP530 Incremental 	Excitation Voltage	+5 ... +30 VDC
	Excitation Current	200 mA max.
	Output Frequency	200 kHz max.
	Output	Linedriver, Push-Pull, CMOS, TTL and HTL compatible
	Output Current	30 mA max., Short Circuit Protection
	Output Voltage	Depends on the excitation voltage (e.g. to obtain TTL-signals the excitation must be 5 V) Compatible to EIA RS-422/RS-485
	Stability (Temperature)	$\pm 0.002\%$ / K Full Scale (sensor mechanism)
	Operation Temperature	-10 ... +70 °C
	Storage Temperature	-30 ... +80 °C
	Transition Time Positive Edge	250 ns
	Transition Time Negative Edge	250 ns
	Protection	Reverse Polarity, Permanent Short Circuit
	Immunity to Interference (EMC)	According to EN61326: 1998

Signal Diagram

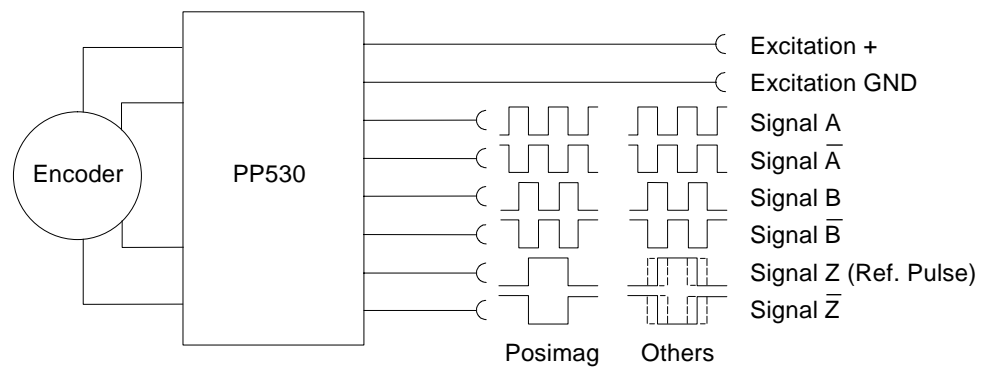


Recommended Processing Circuit

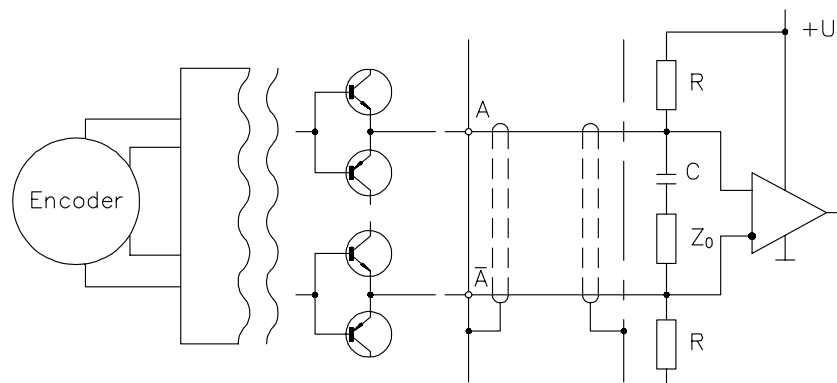

Signal Levels	Excitation	Level	$I_a \leq 5 \text{ mA}$	$I_a \leq 25 \text{ mA}$	$-I_a \leq 5 \text{ mA}$	$-I_a \leq 25 \text{ mA}$
	5 V	U_{aHigh}	$>4.2 \text{ V}$	$>4.2 \text{ V}$	$>4.1 \text{ V}$	$>3.8 \text{ V}$
5 V	U_{aLow}	$<0.5 \text{ V}$	$<1.2 \text{ V}$	$<0.4 \text{ V}$	$<0.4 \text{ V}$	
24 V	U_{aHigh}	$>23.5 \text{ V}$	$>23.5 \text{ V}$	$>23.5 \text{ V}$	$>22.5 \text{ V}$	
24 V	U_{aLow}	$<0.5 \text{ V}$	$<1.2 \text{ V}$	$<0.4 \text{ V}$	$<0.4 \text{ V}$	

Signal Wiring / Connection	Output Signals	Connector
	PP530	WS-CONN-D8
Excitation +		1
Excitation GND (0V)		2
Signal B (A + 90°)		3
Signal A		4
Signal B-bar		5
Signal A-bar		6
Signal Z (Ref. Pulse)		7
Signal Z-bar		8

Mating connector
View to solder terminals



WS-CONN-D8