




AE Sensors B.V.  
Postbus 9084  
3301AB Dordrecht  
Tel.: 078-6213152  
Fax: 078-6213146  
aesensors@aesensors.nl  
www.aesensors.nl

Adherence to specific maximum water content in lubrication oil is required of motors to ensure long-lasting uninterrupted operation. The high quality standards in modern motor construction and operation require non-stop monitoring of the water in oil concentration with alerts.

The WIO Sensor is an in-situ sensor which measures water content in lubrication oils on ship engine, or other oil types in other applications

Water activity (aw) provides the relative availability of water in oil where pure oil has an activity of zero and oil saturated with distilled water has an activity of exactly one.

Under normal operation the WIO200 continuously supplies an output analogue signal of 4 to 20 mA corresponding to 0.01 to 1.00 aw. Alarm indications with 0.01 aw hysteresis are provided for via 2 relays.

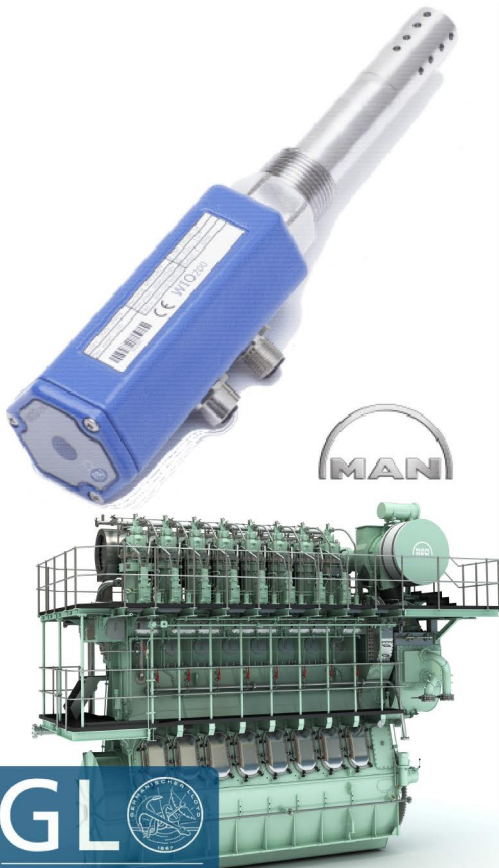

# PAJ GROUP

DEVELOPMENT AND PRODUCTION FOR DEMANDING CUSTOMERS

## WATER-IN-OIL SENSOR LUBE OIL

### MONITORING OF WATER CONTENT IN LUBE OIL

- Water in lube oil is the cause of a range of problems, e.g. rust and corrosion, water etching, erosion, vaporous cavitation, oil oxidation, oil film strength loss, reduction of dielectric strength
- Water content in lube oil is an issue in many applications leading to potentially dangerous situations
- Monitoring enables preventive maintenance and optimal performance

### CUSTOMER BENEFITS

- World leading in terms of accuracy and useability
- Highest quality confirmed by GL approval (cert. no 75 956 – 09 HH)
- CE approval as required by EU
- Calibration certificates for all relevant parameters
- After-sales service

### FUNCTIONAL DESCRIPTION

- Online measurement
- Measuring range: 0,01 to 1,00 aw or ppm water content
- Analogue output: 4 to 20 mA (galvanic isolated)
- Alarm indication via 2 x Alarm relays
- Protection class: IP66

### OPTIONS

- Sensor for ball-valve mounting
- RS232/RS485/CANOpen interface
- Additional temperature measurement
- Adjustable alarm points
- Local display read-out
- Local alarm and reset
- Audible alarm

### QUALITY MANAGEMENT SYSTEM

- ISO 9001
- ISO 14001
- ISO 13485
- IRIS
- ESD Protection System IEC 61340-5-1
- IPC-A-610-CLASS III (workmanship)

PAJ has 100% traceability within development, production and service. Products are tested in our own test facilities with monitored heat and cold tests and registration of the complete test course.