

Pressure Transmitters

ATM.1ST - High Precision Transmitter



Customer benefits

- High measurement accuracy is ensured by sophisticated digital temperature compensation algorithms
- Stainless steel and titanium version for use in acidic or otherwise aggressive media
- Short response times suitable for dynamic pressure measurements
- Fast customization thanks to modular product design

Version: 02.05.2016

Technical Specifications

Pressure measuring range (bar)

	0.1 ... 0.5 (1)	> 0.5 ... 2	> 2 ... 100
Overpressure	3 bar	3 x FS (≥ 3 bar)	3 x FS
Burst pressure, (5)	> 200 bar	> 200 bar	> 850 bar
Accuracy, (6), (\pm % FS)	≤ 0.10	$\leq 0.10 / \leq 0.05$ (9)	$\leq 0.10 / \leq 0.05$ (9)
Total Error, (7), (\pm % FS ; typ. / max.)			
0...70 °C compensated / Allowed process temperature -40...150°C, (8)	$\leq 0.5 / 1.0$	$\leq 0.2 / 0.4$	$\leq 0.1 / 0.3$
-25...100 °C compensated / Allowed process temperature -40...150°C, (8)	$\leq 1.3 / 1.5$	$\leq 0.75 / 1.0$	$\leq 0.75 / 1.0$
-40...100°C compensated / Allowed process temperature -40...150°C, (8)	$\leq 1.5 / 2.0$	$\leq 1.0 / 1.5$	$\leq 1.0 / 1.25$
0...70 °C compensated / Allowed process temperature -40...150°C, (9)	n.a.	$\leq 0.1 / 0.2$	$\leq 0.1 / 0.2$
-25...100 °C compensated / Allowed process temperature -40...150°C, (9)	n.a.	$\leq 0.3 / 0.6$	$\leq 0.3 / 0.6$
-40...125 °C compensated / Allowed process temperature -40...150°C, (9)	n.a.	$\leq 0.5 / 0.8$	$\leq 0.5 / 0.8$
Response time, (typ.)	< 1ms / 10...90% FS	< 1ms / 10...90% FS	< 1ms / 10...90% FS
Long term stability, (10)	< 0.5% FS / < 4 mbar	< 0.2% FS / < 4 mbar	< 0.1% FS / < 0.2% FS

	> 100 ... 600, (2), (4)	> 600 ... 1000, (3)
Overpressure	3 x FS ($\leq 850 / \leq 1500$ bar)	1500 bar
Burst pressure, (5)	> 850 / ≤ 1500 bar	> 1500 bar
Accuracy, (6), (\pm % FS)	≤ 0.10	≤ 0.25
Total Error, (7), (\pm % FS ; typ. / max.)		
0...70 °C compensated / Allowed process temperature -40...150°C, (8)	$\leq 0.3 / 0.5$	$\leq 0.3 / 0.5$
-25...100 °C compensated / Allowed process temperature -40...150°C, (8)	$\leq 0.75 / 1.0$	$\leq 0.75 / 1.0$
-40...100°C compensated / Allowed process temperature -40...150°C, (8)	$\leq 1.0 / 1.25$	$\leq 1.0 / 1.25$
0...70 °C compensated / Allowed process temperature -40...150°C, (9)	n.a.	n.a.
-25...100 °C compensated / Allowed process temperature -40...150°C, (9)	n.a.	n.a.
-40...125 °C compensated / Allowed process temperature -40...150°C, (9)	n.a.	n.a.
Response time, (typ.)	< 1ms / 10...90% FS	< 1ms / 10...90% FS
Long term stability, (10)	< 0.1% FS / < 0.2% FS	< 0.1% FS / < 0.2% FS

1) 50 mbar on request

(2) Titanium available <400bar (burst pressure >550 bar)

(3) Process connection frontal and flush diaphragm available ≤ 600 bar

(4) Overpressure and burst pressure 1500 bar (stainless steel) optional

(5) Transducer

(6) Zero based accuracy according to DIN-16086, incl. hysteresis and repeatability at ambient temperature

(7) Total error including accuracy and temperature influences at maximum signal span (16 mA / 10 V DC)

(8) For currents and voltage output signals





(9) Active compensation, only for current output signals

(10) 1 year (typ. / max.), the long term stability can be improved by aging (burn-in) the sensor

Temperature range

Operating temperature	-40...125 °C
Process temperatur	-40...150 °C
Storage temperatur	-40...125 °C

Electrical specifications

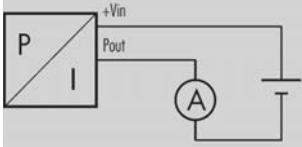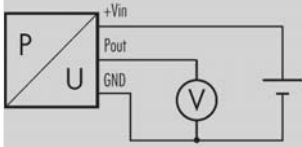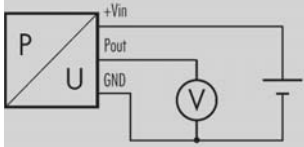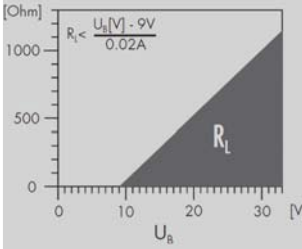	4 ... 20 mA	0 ... 5 V	0 ... 10 V
Power supply	9...33 V DC	10...30 V DC	12...30 V DC
Supply influence	< 0.05% FS	< 0.05% FS	< 0.05% FS
Current consumption		3 mA	3 mA
Circuit diagram			
Load resistance		$R_L > 10k\Omega$	$R_L > 10k\Omega$
Load influence	< 0.05% FS	< 0.05% FS	< 0.05% FS

Qualifications

	Description	Level	Typical interferences
EN 60068-2-6	Vibration	10g (4...2000 Hz / ± 10 mpp)	
EN 60068-2-27	Shock	100g (impulse duration 6 ms)	
EN 55022	Emission, class B	< 30 dBµV/m (0.03...1 GHz)	
EN 61000-4-2	Electrostatic discharge	8 kV contact 15 kV air	
EN 61000-4-3	Irradiated RF	10V/m (0.08...2.7 GHz, 3s)	Radio sets, wireless phones
EN 61000-4-4	Transients (burst)	4 kV	Motors, valves
EN 61000-4-5	Surge	Line-Line: 0.5 kV/42 Ω Line-Earth: 1 kV/42 Ω	Overvoltage
---	Surge (1)	Line-Line: 2.0 kV/2 Ω Line-Earth 5 kV/12 Ω	Overvoltage
EN 61000-4-6	Conducted RF	3 V (0.15...80 MHz, 3 s)	Frequency converters

(1) Only with surge (lightning) protection

Physical specifications

Materials	
Transducer	Stainless steel (316L / 1.4435), Titanium (Gr.2), (1)
Housing	Stainless steel (316L / 1.4435), Titanium (Gr.2)
Seals	Viton (Standard), EPDM, Kalrez, NBR
Cable	PUR, FEP, PE

(1) Hastelloy (C-276) on request

Equipment

Overview

10.00.0091	Accessories overview
HART018	Cable socket M16 (Binder)
HART001	Cable Socket Connector DIN43650
HART002	Cable socket M16 (Binder 723), IP67, 5-pins
HART058	Cable Socket Connector DIN43650 MICRO

Additional documents

Operating and safety instructions

	Article number
10.88.0092	DMM029

Ordering information

		X. XXXX.	XXXX.	XX.	XXX
Type	ATM.1ST				
Pressure type	Gauge	1			
	Absolute (vacuum)	2			
	Sealed gauge	3			
Pressure measuring range	50 mbar ... < 100 mbar	XX			
	100 mbar ... 600 bar	XX			
	> 600 bar	XX			
Process connection	G 1/4 F (Fig. 1)	00			
	1/4 NPT M (Fig. 6)	10			
	1/2 NPT M (Fig. 7)	19			
	G 1/4 M (Fig.2)	11			
	G 1/4, with flush diaphragm (4)	21			
	G 1/4 M, manometer DIN 16288	12			
	G 1/2 M (Fig. 3)	13			
	G 1/2 M, Hastelloy C-276	98			
	G 1/2 M, frontal diaphragm (Fig. 4), (4)	14			
	G 1/2 M, frontal diaphragm Hastelloy C-276	37			
	G 1/2 M, with flush diaphragm membrane (Fig. 5)	15			
	G 1/2 M, manometer DIN 16288	16			
	G 1/2 M, with bore Ø 14 mm	17			
	Customized	99			
Electrical connection	DIN-43650 with metal threaded part, demountable, IP 65 (Fig. 8), (5)		01		
	M16 (Binder 723), 5 pins, IP 67 (Fig. 9), (5)		03		
	M16 (Binder 723), 5 pins,, demountable, IP 67 (Fig. 10), (5)		43		
	MIL C26482, 10-6, IP 40 (Fig. 11), (5)		06		
	M12 (Lumberg RSF4), 4 pins, (Fig. 15), (5)		07		
	PE cable, IP 67, black (Fig. 12), (6), (7)		13		
	PUR cable, IP 67, black (Fig. 12), (6), (8)		15		
	PUR cable, black, with submersible back end IP 68		24		
	FEP cable, IP 67, black (Fig. 12), (6)		21		
	FEP cable, (high temperature), black, IP 67 (6)		11		
	Customized connection available		99		
Output signal	0 ... 5 VDC no active compensation		46		
	0 ... 10 VDC no active compensation		47		
	4 ... 20 mA		05		
	4 ... 20 mA surge protection		08		
Accuracy	≤ ± 0.25 % FS			1	
	≤ ± 0.1 % FS (≤ 600 bar)			2	
	≤ ± 0.05 % FS (≥ 500 mbar...≤ 100 bar) (9) (active comp. / Option E)			6	
Temperature range	0 ... 70°C compensated (allowed process temperature: -40 ... 125°C)				0

-25 ... 100°C compensated (allowed process temperature: -40 ... 125°C)				1
-25 ... 100°C compensated (allowed process temperature: -40 ... 150°C) with cooling fins				2
-40 ... 100°C compensated (allowed process temperature: -40 ... 125°C)				3
-40 ... 125°C compensated (allowed process temperature: -40 ... 125°C), (9) Active compensated / Option E				6
Option 1				
Throttle, (10)				A
Special oil filling: Anderol Food (for food applications)				G
Special oil filling: AS100 (suitable for process temperature -55 ... 150°C)				J
Special oil filling: PAO4 (siliconfree)				Q
Pressure connection elastomerfree				N
Pressure connection welded				V
Option 2				
Electronics packed in gel: Gauge pressure				C
Electronics packed in gel: Absolute and sealed gauge sensors				D
Option 3				
Active compensated (only 4 ... 20 mA and $\geq 500\text{mbar}$... $\leq 100\text{bar}$)				E
Titanium				K
Seals: Viton (standard)				U
Seals: EPDM				S
Seals: Kalrez				T
Seals: NBR (ACS)				H

(4) Process connection available ≤ 600 bar

(5) Cable socket connector not included

(6) Please specify the required cable length and medium

(7) Suitable for drinking water (food approved)


(8) For operating temperature $> 50^\circ\text{C}$, PE or FEP cable must be used, with connector

(9) Active compensated, with connector


(10) Only with pressure connection Fig. 2, Fig. 3, Fig. 6 and Fig. 7

Technical drawings


Pressure connections

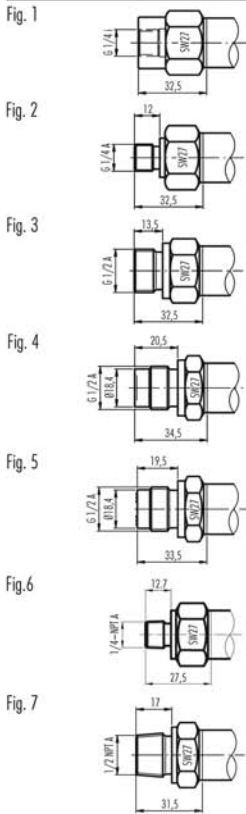


Dimensions

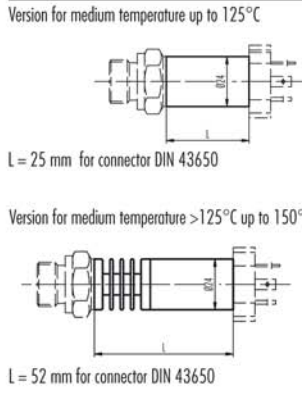



Electrical Connections

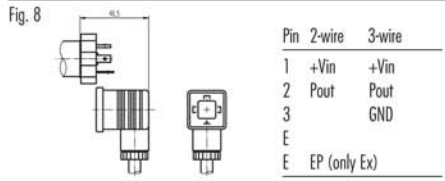


Pin	2-wire	3-wire
1	+Vin	+Vin
2	Pout	Pout
3		GND
E		
E		EP (only Ex)

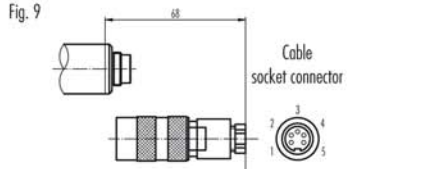


Pin	2-wire	3-wire
1		Pout
2		
3	+Vin	+Vin
4		GND
5		EP (only Ex)

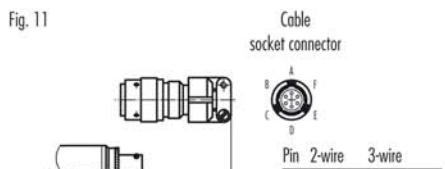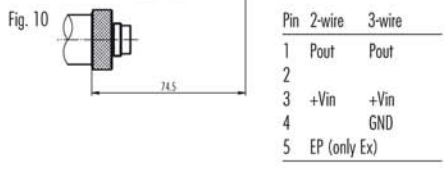

Pin	2-wire	3-wire
A	+Vin	+Vin
B		GND
C	Pout	Pout
D		
E		EP (only Ex)

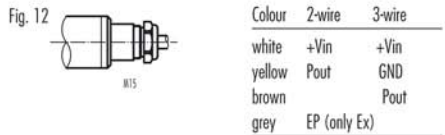

Colour	2-wire	3-wire
white	+Vin	+Vin
yellow	Pout	GND
brown		Pout
grey		EP (only Ex)

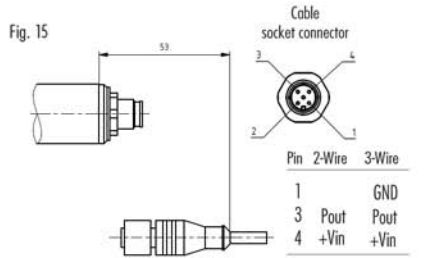

Pin	2-Wire	3-Wire
1		GND
3	Pout	Pout
4	+Vin	+Vin

Specifications may change without notice.

STS Headquarters, Switzerland:
 STS Sensor Technik Sirmach AG
 Rütihofstrasse 8, 8370 Sirmach, Switzerland
 sales@stssensors.com | www.stssensors.com

STS France:
 STS France
 844 Route de la Caille, 74350 Allonzier la Caille, France
 info-fr@stssensors.com | www.stssensors.fr

STS Germany:
 STS Sensoren Transmitter Systeme GmbH
 Poststrasse 7, 71063 Sindelfingen, Germany
 info-de@stssensors.com | www.stssensors.de

STS Great Britain:
 STS Great Britain Ltd.
 Box 3942 | Warwick | CV34 9AE, United Kingdom
 contact@stssensors.com | www.stssensors.co.uk

STS Italy:
 STS Italia s.r.l.
 Via Gesù 5, 20090 Opera (Milano), Italy
 info-italia@stssensors.com | www.stssensors.it