

Pressure and Temperature Transmitters

ATM/T - Analog Pressure Transmitter



Customer benefits

- Multiparameter probe with pressure & temperature
- Demountable electrical connector option allow adjustment of zero and span setting in the field
- Fast customization thanks to modular product design
- Short response time suitable for dynamic pressure measurements

Version: 04.05.2016

Technical Specifications

Pressure measuring range (bar)

	0.1 ... 0.5, (1)	> 0.5 ... 2	> 2 ... 25
Overpressure	3 bar	3 x FS (≥ 3 bar)	3 x FS
Burst pressure, (5)	≥ 30 bar	≥ 30 bar	3 x FS (≥ 25 bar)
Accuracy, (6), (\pm % FS)	$\leq 0.5 / \leq 0.25$	$\leq 0.5 / \leq 0.25 / \leq 0.1$	$\leq 0.5 / \leq 0.25 / \leq 0.1$
Thermal shift, (\pm % FS/$^{\circ}$C)			
Zero point 0 ... 70 $^{\circ}$ C	≤ 0.06	≤ 0.03	≤ 0.015
Zero point -25 ... 85 $^{\circ}$ C	≤ 0.08	≤ 0.04	≤ 0.02
Span 0 ... 70 $^{\circ}$ C	≤ 0.015	≤ 0.015	≤ 0.015
Span -25 ... 85 $^{\circ}$ C	≤ 0.02	≤ 0.02	≤ 0.02
Response time, (typ.)	< 1ms / 10 ... 90% FS	< 1ms / 10 ... 90% FS	< 1ms / 10 ... 90% FS
Long term stability, (7)	< 0.5% FS / < 4 mbar	< 0.2% FS / < 4 mbar	< 0.1% FS / < 0.2% FS

	> 25 ... 600, (2), (4)	> 600 ... 1000, (2), (3)
Overpressure	3 x FS ($\leq 850 / \leq 1500$ bar)	1500 bar
Burst pressure, (5)	> 850 / ≤ 1500 bar	> 1500 bar
Accuracy, (6), (\pm % FS)	$\leq 0.5 / \leq 0.25 / \leq 0.1$	$\leq 1 / \leq 0.5 / \leq 0.25$
Thermal shift, (\pm % FS/$^{\circ}$C)		
Zero point 0 ... 70 $^{\circ}$ C	≤ 0.015	≤ 0.015
Zero point -25 ... 85 $^{\circ}$ C	≤ 0.02	≤ 0.02
Span 0 ... 70 $^{\circ}$ C	≤ 0.015	≤ 0.015
Span -25 ... 85 $^{\circ}$ C	≤ 0.02	≤ 0.02
Response time, (typ.)	< 1ms / 10 ... 90% FS	< 1ms / 10 ... 90% FS
Long term stability, (7)	< 0.1% FS / < 0.2% FS	< 0.1% FS / < 0.2% FS

(1) 50 mbar on request

(2) Titanium available ≤ 400 bar (burst pressure > 550 bar)

(3) Process connection frontal and flush diaphragm available ≤ 600 bar

(4) Overpressure and burst pressure 1500 bar (stainless steel) optional

(5) Transducer

(6) Zero based accuracy according to DIN-16086, incl. hysteresis and repeatability at ambient temperature

(7) 1 year (typ. / max.), the long term stability can be improved by ageing (burn-in) the sensor

Temperature measuring range

Standard, (1)	-25 ... 100 $^{\circ}$ C
Lower end of range	-40 $^{\circ}$ C
Upper end of range	150 $^{\circ}$ C
Temperature span, (2)	> 30 $^{\circ}$ C
Accuracy, (3)	
0...70 $^{\circ}$ C, (typ. / max.)	$\pm 0.5 / 1.0$ $^{\circ}$ C
-25...85 $^{\circ}$ C, (typ. / max.)	$\pm 1.0 / 1.5$ $^{\circ}$ C
-25...100 $^{\circ}$ C, (typ. / max.)	± 2.0 $^{\circ}$ C

(1) Other temperature measuring ranges on request

(2) Measuring range 15 ... 30 $^{\circ}$ C must be contained

(3) Probe, electronics, calibration

Temperature range

Operating temperature	-25 ... 85 $^{\circ}$ C
Process temperature	-40 ... 150 $^{\circ}$ C
Storage temperature	-25 ... 85 $^{\circ}$ C

Electrical specifications

	4 ... 20 mA	0 ... 20 mA	0 ... 5 V / 0 ... 10 V
Power supply	15 ... 30 VDC	15 ... 30 VDC	15 ... 30 VDC
Supply influence	< 0.1% FS	< 0.1% FS	< 0.1% FS
Current consumption			3 mA
Circuit diagram			
Load resistance	$(U_{\text{supply}} - 5V) / 0.02A$	$(U_{\text{supply}} - 5V) / 0.02A$	$R_L > 10k\Omega$
Load influence	< 0.1% FS	< 0.1% FS	< 0.1% FS

Qualifications

	Description	Level	Typical interferences
EN 61000-4-2	Electrostatic discharge	4 kV contact 8 kV air	
EN 61000-4-3	Irradiated RF	10V/m (0.08 ... 1 GHz, 3s)	Radio sets, wireless phones
EN 61000-4-4	Transients (burst)	2 kV	Motors, valves
EN 61000-4-6	Conducted RF	10 V (0.15 ... 80 MHz, 3 s)	Frequency converters

Physical specifications

Materials	
Transducer	Stainless steel (316L / 1.4435), titanium (Gr. 2), (1)
Housing	Stainless steel (316L / 1.4404), titanium (Gr. 2)
Seals	Viton
Cable	PUR, FEP, PE

(1) Hastelloy (C-276) on request

Equipment

Overview

10.00.0091	Accessories overview
HART001	Cable Socket Connector DIN43650

Additional documents

Operating and safety instructions

	Article number
10.88.0092	DMM029

Ordering information

		X. XXXX.	XXXX.	XX.	XXX
Type					
	ATM/T	26			
Pressure type					
	Gauge	1			
	Absolute (vacuum)	2			
	Sealed gauge	3			
Pressure measuring range					
	50 mbar ... < 100 mbar	XX			
	100 mbar ... 600 bar	XX			
	> 600 bar	XX			
	Negative ranges, offset, special adjustment	99			
Process connection					
	G 1/2 M, frontal diaphragm, (Fig. 5), (4)	14			
	G 1/2 M, with flush diaphragm, (Fig. 6), (4)	15			
	Customized	99			
Electrical connection					
	DIN 43650 with metal threaded part, demountable, IP 65 (Fig. 10), (5)		01		
	M16 (Binder 723), 5-pin, IP 67 (Fig. 11), (5)		03		
	M16 (Binder 723), 5-pin, demountable, IP 67 (Fig. 12), (5)		43		
	MIL C26482, 10-6, IP 40 (Fig. 13), (5)		06		
	PE cable, IP 67, black (Fig. 14), (6), (7)		13		
	PUR cable, IP 67, black (Fig. 14), (6), (8)		15		
	FEP cable, IP 67, black (Fig. 14), (6)		21		
	Customized connection available		99		
Output signal					
	0 ... 5 V DC		46		
	0 ... 10 V DC		47		
	0 ... 20 mA		00		
	4 ... 20 mA		05		
	Customized		99		
Accuracy					
	≤ ± 0.5 % FS			0	
	≤ ± 0.25 % FS			1	
	≤ ± 0.1 % FS			2	
Temperature range					
	0 ... 70°C compensated (allowed process temperature: -25 ... 100°C)			0	
	-25 ... 100°C compensated (allowed process temperature: -25 ... 100°C)			7	
	-25 ... 85°C compensated (allowed process temperature: -25 ... 100°C)			1	
	-25 ... 85°C compensated (allowed process temperature: -25 ... 150°C) with cooling fins			2	
	-25 ... 100°C compensated (allowed process temperature: -25 ... 150°C) with cooling fins			6	
	Customized			9	
Option 1					
	Special oil filling: Anderol Food (for food applications)				G
	Special oil filling: AS100 (suitable for process temperatures -55...150°C)				J

	Special oil filling: PA04 (silicone free)					Q
Option 2						
	Electronics packed in gel: Gauge pressure					D
	Titanium					K
	Seals: Viton (standard)					U
Option 3						

- (4) Process connection available ≤ 600 bar
- (5) Cable socket connector not included
- (6) Please specify the required cable length and medium
- (7) Suitable for drinking water (food approved)
- (8) For operating temperature $> 50^{\circ}\text{C}$, PE or FEP cable must be used

Technical drawings

Pressure Connections




Fig. 5






Fig. 6

Dimensions

Version for media temperature up to 100°C

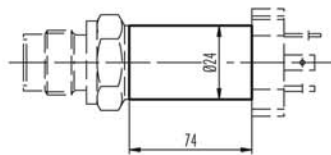

Version for media temperature up to 150°C

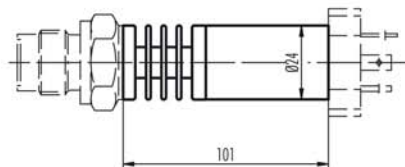

Electrical Connections

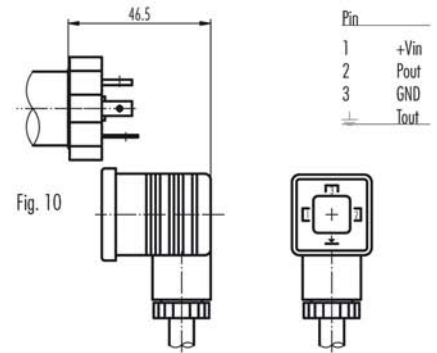


Fig. 10

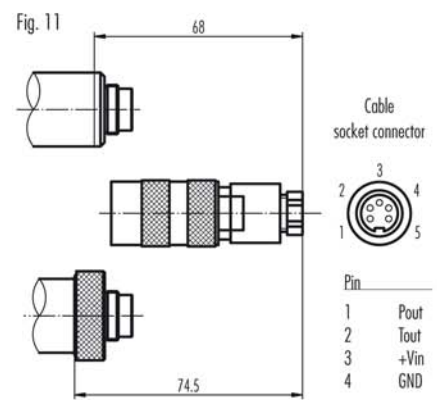


Fig. 12

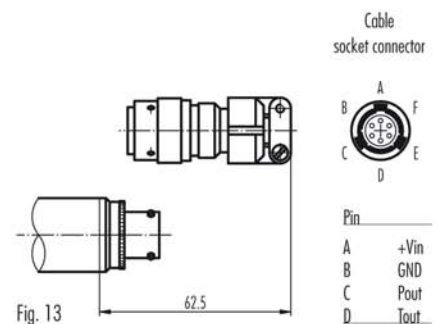


Fig. 13

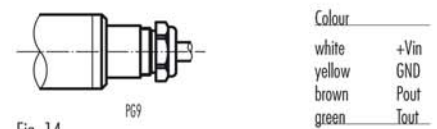


Fig. 14

Specifications may change without notice.

STS Headquarters, Switzerland:
 STS Sensor Technik Sirmach AG
 Rütihofstrasse 8, 8370 Sirmach, Switzerland
 sales@stssensors.com | www.stssensors.com

STS France:
 STS France
 844 Route de la Caille, 74350 Allonzier la Caille, France
 info-fr@stssensors.com | www.stssensors.fr

STS Germany:
 STS Sensoren Transmitter Systeme GmbH
 Poststrasse 7, 71063 Sindelfingen, Germany
 info-de@stssensors.com | www.stssensors.de

STS Great Britain:
 STS Great Britain Ltd.
 Box 3942 | Warwick | CV34 9AE, United Kingdom
 contact@stssensors.com | www.stssensors.co.uk

STS Italy:
 STS Italia s.r.l.
 Via Gesù 5, 20090 Opera (Milano), Italy
 info-italia@stssensors.com | www.stssensors.it