

Intrinsically Safe Submersible Transmitters - ATEX/IECEx certified

PTM/N/Ex - Programmable 4-20mA



Customer benefits

- Certificate: ATEX
- High flexibility due to scalable pressure range
- Adjustment of zero and span setting through software commands
- Fast customization thanks to configurable product design
- Stainless steel and titanium version for use in acidic or otherwise aggressive media

Version: 03.05.2016

Technical Specifications

Pressure measuring range (mH2O)

	1 ... 5	> 5 ... 20	> 20 ... 250
Overpressure	3 bar	3 x FS (≥ 3 bar)	3 x FS
Burst pressure, (2)	> 200 bar	> 200 bar	> 200 bar
Accuracy, (2), (\pm % FS)	$\leq \pm 0.25$	$\leq \pm 0.1$	$\leq \pm 0.1$
Total error, (3), (4), (\pm % FS)			
-10...50°C, (typ. / max.)	$\leq 0.15 / 0.3$ (≤ 200 mbar: 0.3 / 0.6)	$\leq 0.15 / 0.3$	$\leq 0.15 / 0.3$
-25...85°C, (typ. / max.)	$\leq 0.65 / 0.7$ (≤ 200 mbar: 0.65 / 0.8)	$\leq 0.65 / 0.7$	$\leq 0.55 / 0.7$
Long term stability, (5)	< 0.5% FS / < 4 mbar	< 0.2% FS / < 4 mbar	< 0.1% FS / < 0.2% FS

(1) Transducer

(2) Zero based accuracy according to DIN 16086, incl. hysteresis and repeatability at ambient temperature

(3) Total error including accuracy and temperature influences at maximum signal span (16 mA)

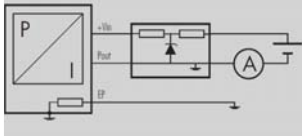
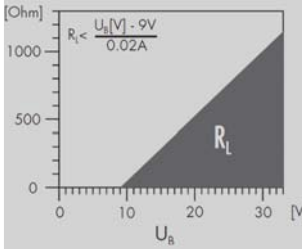
(4) Active compensated

(5) 1 year (typ. / max.), the long term stability can be improved by ageing (burn-in) the sensor

Temperature range

Operating temperature	-5...80 °C
Process temperature	-5...80 °C
Storage temperature	-10...80 °C

Electrical specifications

Resolution	0.025% FS
Output adjustable	
4 mA	-5% FS...105% FS
20 mA	-5% FS...105% FS
Span	25% FS...110% FS (≥ 1 mH2O)
Low pass filter	0.1 / 1 / 10 / 30 Hz (standard: 30 Hz)
Power supply	9...28 V DC
Supply influence	< 0.1% FS
Circuit diagram	
Load resistance	
Load influence	< 0.1% FS

ATEX Approval

Certificate, (1)	SEV 08 ATEX 0142		
Gas	II 1G Ex ia IIC T3 ... T6	EN 60079-0 / -11 / -26	
Dust	II 1D Ex ia IIIC IP6x T80°C ... T125°C	EN 61241-0 / -11	
Temperature class, (2)	T6	T4	T4
Ambient temperature	-5...50 °C	-5...80 °C	-5...80 °C
Process temperature	-5...50 °C	-5...50 °C	-5...80 °C
Maximum values of the connection circuit	30 V / 140 mA / 0.9W		

(1) For detailed Ex specifications see certificate and operating and safety instructions

(2) Without any information about temperature class the transmitter will be delivered for T4

GL Approval

Certificate	60332-09 HH
Field of application	D, F, EMC1

Additional approvals

ABS	09-HG436727/1-PDA
DNV	A-11280

Qualifications

	Description	Level	Typical interferences
EN 60068-2-6	Vibration	4g (4...100 Hz / ± 3.2 mmpp)	
EN 60068-2-27	Shock	100g (impulse duration 6 ms)	
EN 55022	Emission, class B	< 30 dBµV/m (0.03...1 GHz)	
EN 61000-4-2	Electrostatic discharge	8 kV contact 15 kV air	
EN 61000-4-3	Irradiated RF	10V/m (0.08...1 GHz)	Radio sets, wireless phones
EN 61000-4-4	Transients (burst)	4 kV	Motors, valves
EN 61000-4-5	Surge	Line-Line: 0.5 kV/42 Ω Line-Earth: 1 kV/42 Ω	Lightning
EN 61000-4-6	Conducted RF	10 V (0.15...80 MHz, 3 s)	Frequency converters

Physical specifications

Materials	
Transducer	Stainless steel (316L / 1.4435), titanium (Gr. 2), (1)
Housing	Stainless steel (316L / 1.4404), titanium (Gr. 2)
Seals	Viton (standard), EPDM, Kalrez, NBR
Cable	PUR, FEP
Weight (2)	157 g

(1) Hastelloy (C-276) on request

(2) Specification for a PTM/N/Ex, closed, cable

Equipment

Overview

10.00.0091	Accessories overview

Interface

102442	PTM/Ex - Interface

Software

101224	PC Software V1.50

Additional documents

Manuals

	Article number	Description
10.00.0079	DEB003	Configuration software
10.00.0089	DEB005	User manual

Operating and safety instructions

	Article number
10.00.0271	DMM023

Ordering information

		X. XXXX.	XXXX.	XX.	XXX
Type	PTM/N/Ex	48			
Pressure type	Gauge	1			
	Absolute (vacuum)	2			
Pressure measuring range	1 ... 250 mH2O	XX			
	Offset, special adjustment	99			
Process connection	Closed (Fig. 1)	55			
	Open (Fig. 2)	56			
	G 1/4 M (Fig. 3)	11			
	G 1/2 M (Fig. 3)	13			
	Customized	99			
Electrical connection	PUR cable, blue, IP 68, (2), (3)		17		
	FEP cable, blue, IP 68, (2)		22		
	Connectable version, IP 68, M12 (Lumberg RSF4)		07		
Output signal	4...20 mA		05		
	4...20 mA with surge protection		08		
Accuracy	$\leq \pm 0.25$ % FS (≤ 5 mH2O)			1	
	$\leq \pm 0.1$ % FS (> 5 mH2O)			2	
Temperature range	T6 (Ta: -5...50 °C) -5...50 °C compensated (allowed process temperature: -5...50°C)			3	
	T4 (Ta: -5...80 °C) -5...50 °C compensated (allowed process temperature: -5...50°C)			4	
	T4 (Ta: -5...80 °C) -5...80 °C compensated (allowed process temperature: -5...80°C)			5	
Option 1	Special oil filling: Anderol Food (for food applications)				G
	Cutting ring connection G 1/2 M				
	Strain relief				
Option 2					
Option 3	Ballast weight 1.4435				B
	Active compensated				E
	Version titanium (without ballast weight)				K
	Seals: Viton (standard)				U
	Seals: EPDM				S
	Seals: Kalrez (Level)				T
	Seals: NBR (ACS)				H
	Humidity filter element for gauge version (only for PUR cable)				Z

(2) Please specify the required cable length and medium

(3) For operating temperature > 50 °C, FEP cable must be used

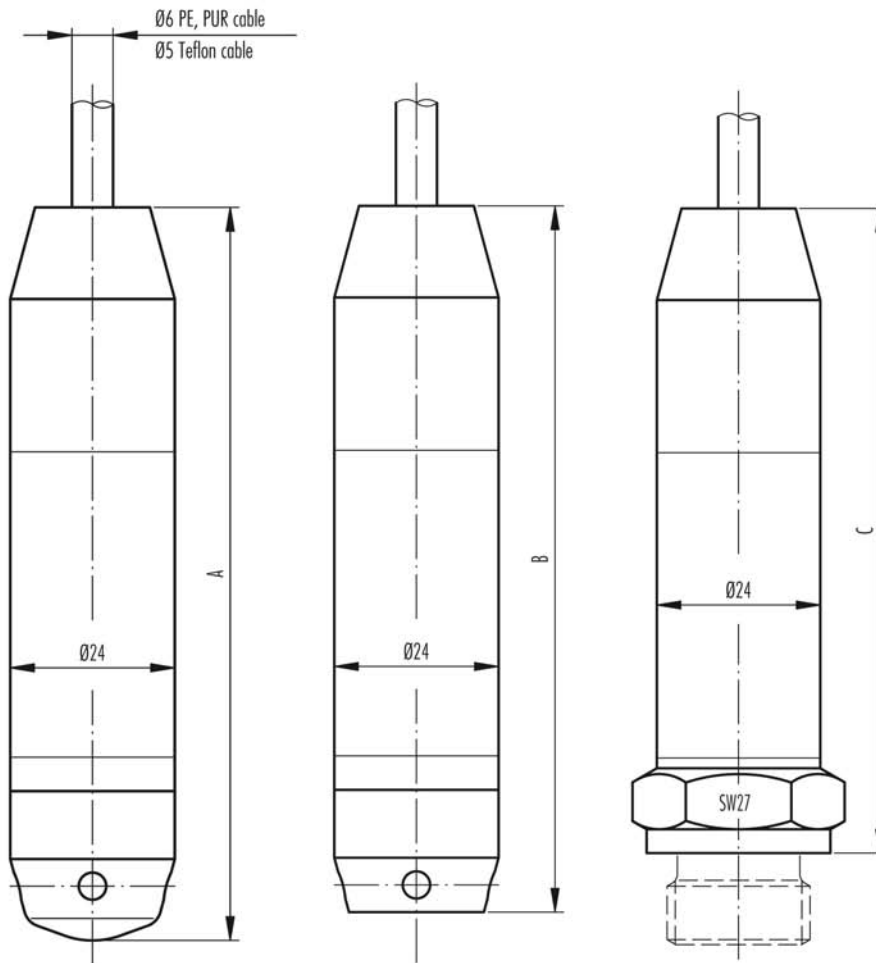
Technical drawings

Dimensions

closed version (Fig. 1)

open version (Fig. 2)

with thread (Fig. 3)



Standard and version with surge (lightning) protection

	A [mm]	B [mm]	C [mm]	Weight [g]
without ballast weight	157	153	on request*	ca. 200
with ballast weight	244	240	on request*	ca. 460

*C: Depending on process connection

Colour	2-wire
white	+Vin
yellow	Pout
grey	EP

Specifications may change without notice.

STS Headquarters, Switzerland:
 STS Sensor Technik Sirmach AG
 Rütihofstrasse 8, 8370 Sirmach, Switzerland
 sales@stssensors.com | www.stssensors.com

STS France:
 STS France
 844 Route de la Caille, 74350 Allonzier la Caille, France
 info-fr@stssensors.com | www.stssensors.fr

STS Germany:
 STS Sensoren Transmitter Systeme GmbH
 Poststrasse 7, 71063 Sindelfingen, Germany
 info-de@stssensors.com | www.stssensors.de

STS Great Britain:
 STS Great Britain Ltd.
 Box 3942 | Warwick | CV34 9AE, United Kingdom
 contact@stssensors.com | www.stssensors.co.uk

STS Italy:
 STS Italia s.r.l.
 Via Gesù 5, 20090 Opera (Milano), Italy
 info-italia@stssensors.com | www.stssensors.it