

## 3DM-CV5™-10 Inertial Measurement Unit (IMU)




3DM-CV5™-10- miniature, industrial-grade inertial measurement unit (IMU)

The **LORD Sensing 3DM-CV5** family of industrial-grade, board-level inertial sensors provides a wide range of triaxial inertial measurements and computed attitude and navigation solutions.

In all models, the Inertial Measurement Unit (IMU) includes direct measurement of acceleration and angular rate, and are fully temperature-compensated and calibrated over the operating temperature. The use of Micro-Electro-Mechanical System (MEMS) technology allows for highly accurate, small, lightweight devices.

The LORD Sensing **MIP Monitor** software can be used for device configuration, live data monitoring, and recording. Alternatively, the **MIP Data Communications Protocol** is available for development of custom interfaces and easy OEM integration.

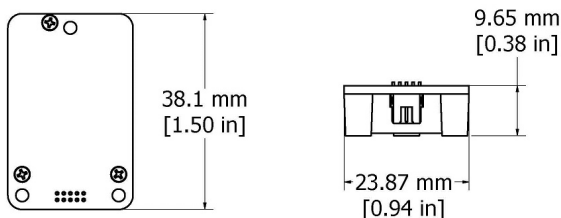

### Product Highlights

- Triaxial accelerometer, gyroscope, and temperature sensors achieve the optimal combination of measurement qualities
- Smallest, lightest, highest performance IMU in its class

### Features and Benefits

#### **Best in Class Performance**

- Fully calibrated, temperature-compensated, and mathematically-aligned to an orthogonal coordinate system for highly accurate outputs
- High-performance, low-cost solution
- Direct PCB mount or chassis mount with ribbon cable
- Precision mounting alignment features

#### **Ease of Use**

- Easy integration via comprehensive and fully backwards-compatible communication protocol
- Robust, forward compatible MIP packet protocol

#### **Cost Effective**

- Out-of-the box solution reduces development time
- Volume discounts

### Applications

- Platform stabilization, artificial horizon
- Health and usage monitoring of vehicles

## Specifications

General		
<b>Integrated sensors</b>	Triaxial accelerometer, triaxial gyroscope, and temperature sensors	
<b>Data outputs</b>	<b>Inertial Measurement Unit (IMU) outputs:</b> acceleration, angular rate, delta theta, delta velocity	
Inertial Measurement Unit (IMU) Sensor Outputs		
	Accelerometer	Gyroscope
<b>Measurement range</b>	±8 g (standard) ±2 g, ±4 g (optional)	±500°/sec (standard) ±250°, ±1000°/sec (optional)
<b>Non-linearity</b>	±0.04% fs	0.06% fs
<b>Bias instability</b>	±0.04 mg	8°/hr
<b>Initial bias error</b>	±0.004 g	0.1°/sec
<b>Scale factor stability</b>	±0.05%	±0.05%
<b>Noise density</b>	100 µg/√Hz	0.0075°/sec/√Hz (300°/sec)
<b>Alignment error</b>	±0.05°	±0.05°
<b>Adjustable bandwidth</b>	500 Hz (max)	500 Hz (max)
<b>Offset error over temperature</b>	0.2% (typ)	0.1% (typ)
<b>Gain error over temperature</b>	0.05% (typ)	0.06% (typ)
<b>Scale factor non-linearity (@ 25° C)</b>	0.04% (typ) 0.2% (max)	0.04% (typ) 0.15% (max)
<b>IMU filtering</b>	Digital averaging filter (user adjustable) sampled at 2 kHz and scaled into physical units; coning and sculling integrals computed at 1 kHz	
<b>Sampling rate</b>	2 kHz	2 kHz
<b>IMU data output rate</b>	1 Hz to 1000 Hz	
Pressure Sensor		
<b>Range</b>	260 to 1260 hPa	
<b>Resolution</b>	0.01 hPa	
<b>Noise</b>	0.01 hPa RMS	
<b>Sampling rate</b>	25 Hz	

Operating Parameters	
<b>Communication</b>	TTL serial (3.0 V dc, 9,600 bps to 921,600 bps, default 115,200)
<b>Power source</b>	+ 3.2 to 5.2 V dc
<b>Power consumption</b>	100 mW (typ)
<b>Operating temperature</b>	-40 °C to +85 °C
<b>Mechanical shock limit</b>	500 g (calibration unaffected) 1000 g (bias may change), 5000 g (survivability)
Physical Specifications	
<b>Dimensions</b>	38 mm x 24 mm x 9.7 mm
<b>Weight</b>	8 grams
<b>Enclosure material</b>	Aluminum
<b>Regulatory compliance</b>	ROHS, CE
Integration	
<b>Connectors</b>	Data/power output: Samtec FTSH Series (FTSH-105-01-F-D-K)
<b>Software</b>	MIP Monitor, Windows XP/Vista/7/8/10 compatible
<b>Compatibility</b>	Protocol compatibility across 3DM-GX3, GX4, RQ1, GQ4, and GX5 product families
<b>Software development kit (SDK)</b>	MIP data communications protocol with sample code available (OS and platform independent)

**LORD SENSING**  
MicroStrain

LORD Corporation  
MicroStrain® Sensing Systems  
459 Hurricane Lane, Suite 102  
Williston, VT 05495 USA

ph: 802-862-6629  
[sensing\\_sales@LORD.com](mailto:sensing_sales@LORD.com)  
[sensing\\_support@LORD.com](mailto:sensing_support@LORD.com)